

Model Number: **ASE-C4-MR-17-2-FCA**


Product Code: **1606**

Micro Processor Controlled



Specifications:

Parameters	Specifications
Wavelength Range	1530 – 1565nm
Spectral Flattening Filter	Included
Output Power	+17 dBm
Output Spectra Flatness	≤ 2.0 dB peak-to-peak
Optical Output Fiber	900um loose tube, FC/APC, red, 1 meter, SMF-28
Output Power Monitoring Range	+8 to +18 dBm
Output Power Measurement Accuracy	≤ +/- 0.5 dB, 1550 nm
Polarization Dependence of Output Power	≤ 0.3 dB
Control and Communication Interface	RS-232, UART 5V/0V voltage level
Dimension	90 x 70 x 15mm
Power Input	+5 VDC +/- 5%
Electrical Interface Connector	PN: SQT-115-03-L-D, Female 30-PIN
Operational Case Temperature Range	0 to +65 °C
Mode of Operation	AOPC (constant output power control), ACC (constant pump current control)

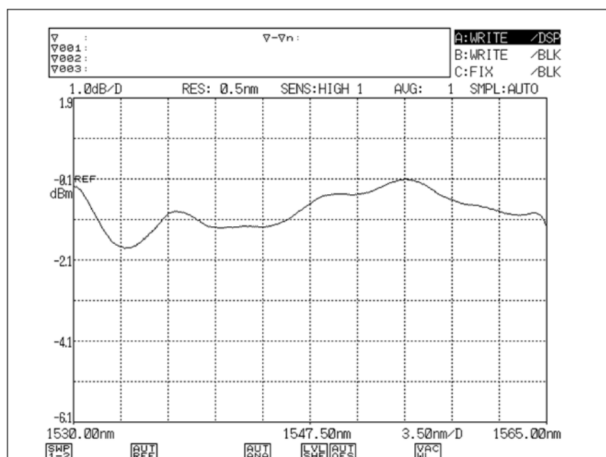

Typical Optical Spectra of ASE Output, +25°C Case Temperature

Electrical connector:

Part number: SQT-115-03-L-D

Pin No.	Description	Pin No.	Description
1	5V Vin	2	5V Vin
3	-	4	-
5	GROUND	6	GROUND
7	Serial In	8	Serial Out
9	GROUND	10	GROUND
11	-	12	EXTERNAL RESET
13	PUMP ENABLE / DISABLE	14	OUTPUT MUTE
15	CASE TEMPERATURE ALARM	16	COMMON ALARM
17	TEMPERATURE ALARM	18	PUMP BIAS ALARM
19	LOSS OF INPUT POWER ALARM	20	LOSS OF OUTPUT POWER ALARM
21	GROUND	22	GROUND
23	INPUT POWER MONITOR	24	OUTPUT POWER MONITOR
25	GROUND	26	GROUND
27	-	28	-
29	5V Vin	30	5V Vin

